




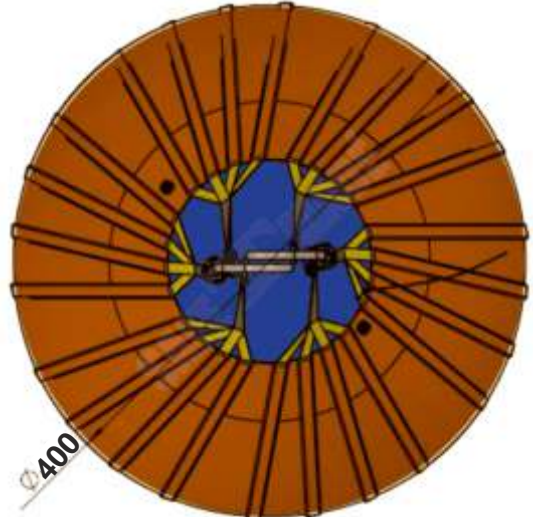


|                                   |                                |                    |
|-----------------------------------|--------------------------------|--------------------|
| WB/40                             | 40000 kg                       | CHECK VALVE SYSTEM |
| <b>MATERIAL</b>                   |                                |                    |
| LINKAGE ASSEMBLY                  | 21200 kg x 2                   |                    |
| ALLOY SHACKLES                    | 15000 kg x 6                   |                    |
| BASE CHROME RING                  | SWL 83800 kg x 1               |                    |
| SLING                             | 3000 kg x 24                   |                    |
| SLING U TYPE                      | 4000 kg x 6 (8T6t=48t)         |                    |
| SLING MATERIAL POLYESTER          | SWL 13600 N/60 mm              |                    |
| FABRIC                            | 7000 N/50mm kg                 |                    |
| FABRIC MATERIAL POLYESTER         | PES                            |                    |
| FABRIC TYPE OF COATING            | PVC                            |                    |
| FABRIC MATERIAL TOTAL WEIGHT      | 1450 gr/m2 SWL 7000/5500 N/5cm |                    |
| EMPTY WEIGHT                      | 345 kg                         |                    |
| VOLUME                            | 40 m <sup>3</sup>              |                    |
| WEIGHT                            | 40000 kg                       |                    |
| DIA                               | 400 cm                         |                    |
| FILLED HEIGHT                     | 400 CM                         |                    |
| TOTAL HEIGHT                      | 530 CM                         |                    |
| Full weight with seawater average | 1,018 gr/lt                    |                    |

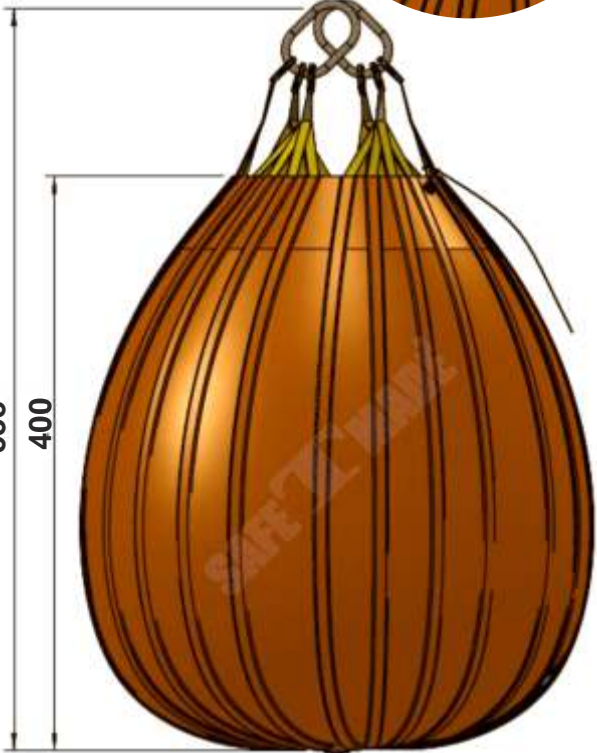

WB/40

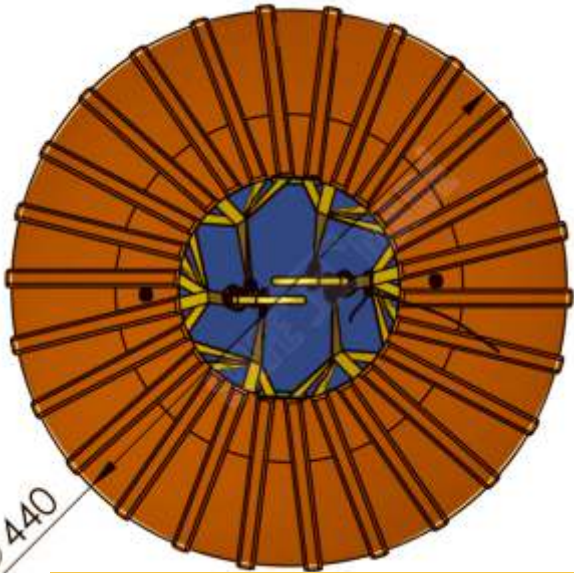

|                                   |                                |                    |
|-----------------------------------|--------------------------------|--------------------|
| WB/50                             | 50.000 kg                      | CHECK VALVE SYSTEM |
| <b>MATERIAL</b>                   |                                |                    |
| LINKAGE ASSEMBLY                  | 31500 kg x 2                   |                    |
| ALLOY SHACKLES                    | 15000 kg x 6                   |                    |
| BASE CHROME RING                  | SWL 83800 kg x 1               |                    |
| SLING                             | 3000 kg x 26                   |                    |
| SLING U TYPE                      | 5000 kg x 6 (u10t6t=60)        |                    |
| SLING MATERIAL POLYESTER          | SWL 13600 N/60 mm              |                    |
| FABRIC                            | 7000 N/50mm kg                 |                    |
| FABRIC MATERIAL POLYESTER         | PES                            |                    |
| FABRIC TYPE OF COATING            | PVC                            |                    |
| FABRIC MATERIAL TOTAL WEIGHT      | 1450 gr/m2 SWL 7000/5500 N/5cm |                    |
| EMPTY WEIGHT                      | 408 kg                         |                    |
| VOLUME                            | 50 m <sup>3</sup>              |                    |
| WEIGHT                            | 50000 kg                       |                    |
| DIA                               | 440 cm                         |                    |
| FILLED HEIGHT                     | 456 CM                         |                    |
| TOTAL HEIGHT                      | 580 CM                         |                    |
| Full weight with seawater average | 1,018 gr/lt                    |                    |

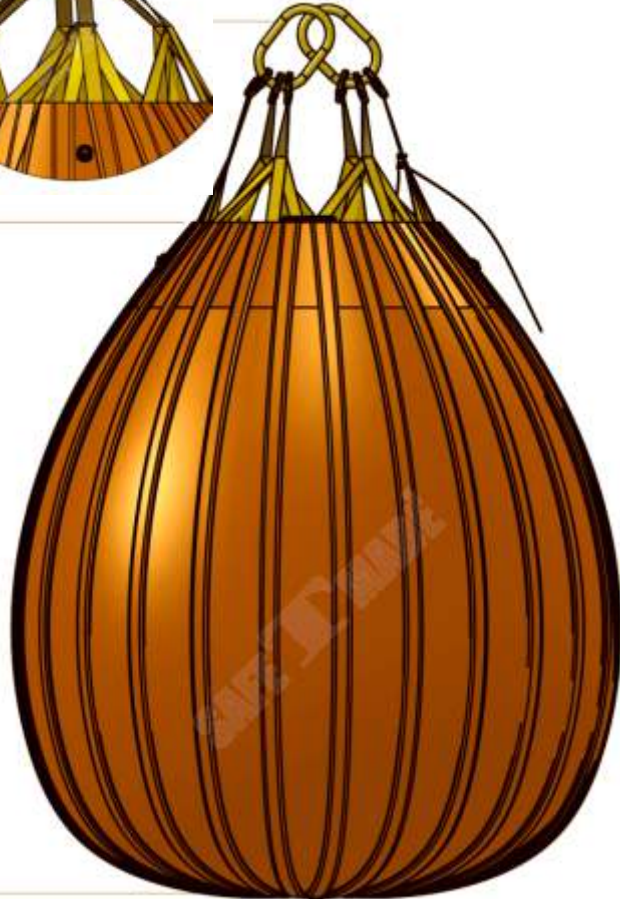

WB/50